


N-M – SMA-M - 6GHz – RF Coaxial Adaptor

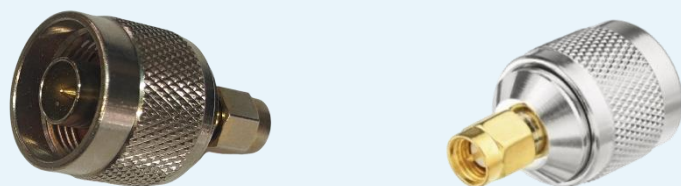

Description		
Type	N Male – SMA M Adaptor	
Model	TE-ADR-N-M-SMA-M-6G	
Material and Finish		
	Material	Finish
Centre Contact	Brass	Gold
Dielectric	Teflon	-
Body	Brass	Nickel
Mechanical/Environmental Specifications		
Durability	≤ 500 Mating Cycles	
Operating Temperature	-10 ~ 55 °C	
Relative Humidity	≤ 95%	
Applications	Indoor/Outdoor	
Waterproof Grade	IP65	
RoHS Compliant	Yes	
Electrical Specifications		
Frequency Range	DC – 6 GHz	
VSWR	≤ 1.2:1	
Impedance	50 Ω	
Contact Resistance	Centre Contact ≤1mΩ Outer Contact ≤0.25mΩ	
Insulation Resistance	≥ 5000MΩ	

TE TECH SOLUTION

Head Office: Mala Bhawan, Near Lohar Basti, Rangamati, Sindri, Dhanbad Jharkhand – 828122
 R&D Centre: FF-02, 1st Floor, STPI Building, Near BIT Sindri, Sindri, Dhanbad, Jharkhand (India) – 828123
 Branch Office: 38, Hanuman Layout, 1st Cross, Ramchandrapura, Jalahalli – Post, Bangalore (India) – 560013
 Tel : +91-7829139667, 8910780736, 0326-3560859 | Email: enquiry@tetechnsolution.com | www.tetechnsolution.com

Dielectric Withstand Voltage	≥2500V RMS, 50Hz, at sea level
------------------------------	--------------------------------

TE TECH SOLUTION

Head Office: Mala Bhawan, Near Lohar Basti, Rangamati, Sindri, Dhanbad Jharkhand – 828122
R&D Centre: FF-02, 1st Floor, STPI Building, Near BIT Sindri, Sindri, Dhanbad, Jharkhand (India) – 828123
Branch Office: 38, Hanuman Layout, 1st Cross, Ramchandrapura, Jalahalli – Post, Bangalore (India) – 560013
Tel : +91-7829139667, 8910780736, 0326-3560859 | Email: enquiry@tetechsolution.com | www.tetechsolution.com